



MODELS

KGL-OF-(40, 50, 60)-S

KGL-OF-(40, 50, 60)-R

GRAB-N-GO LOW PROFILE CASE

CASE HOLDS 36°F TO 40°F • FORCED AIR REFRIGERATION • OPEN FRONT
FRONT LOADING • LED LIGHTING IN CANOPY AND UNDER ALL SHELVES
PULL DOWN NIGHT CURTAIN • CASES CAN BE MULTIPLEXED



AUTODESK®
REVIT®

SELF CONTAINED	Model	Width (inches)	Front Capacity Cu.ft	Electrical 115 Volts			NEMA Plug	Weight lbs		Crate Size (inches)		
				Compressor		Total Amps		No Crate	With Crate	L"	W"	H"
				H.P	F.L.A							
	KGL-OF-40-S	41	12.98	5/8	8.9	16.42	5-20P	357	507	43.8	34.5	67.8
	KGL-OF-50-S	50.2	16.21	3/4	16	24.00	Hard-wired	394	569	53	34.5	67.8
KGL-OF-60-S	60.6	19.85	3/4	16	24.06	Hard-wired	454	653	63.5	34.5	67.8	

REMOTE	Model	Width (inches)	B.T.U	115 Volts Total Amps	Nema Plug	Weight lbs	
						No Crate	With Crate
	KGL-OF-40-R	41	4125	0.40	Hard-wired	291	441
	KGL-OF-50-R	50.2	4897	0.43	Hard-wired	317	491
	KGL-OF-60-R	60.6	5141	0.49	Hard-wired	376	575

STANDARD FEATURES


Silver colored PVC coated steel front panel
 Pull down night curtain
 CFC free injected foam insulation
 PVC coated steel gray interior
 Black steel kick plate
 Foamed polystyrene black end panels
 Tempered side glass
 Height adjustable shelves can be tilted
 Products stop on shelves
 Temperature and defrost regulated by a digital controller
 Digital thermometer
 Slide out condensing unit on self-contained units
 Removable condensate evaporating pan for easy cleaning on self contained units
 Cord and plug KGL-OF-40S only
 Levelling feet

OPTIONAL FEATURES

Stainless steel exterior and / or interior
 Other colors available
 Additional shelves
 Price tag molding
 Joining kit
 Partition or product dividers
 Condensate evaporating pan for remote cases
 Casters-add 4-3/8" to height
 Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

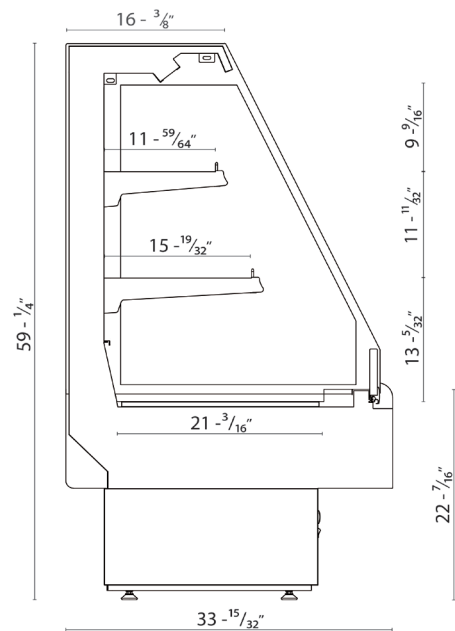

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 6.7 amps added to the amp load. Remote cases must be hard wired – no plugs.



Tel: 786.600.4687 / Toll Free: 844.218.8477

Fax: 786.661.4100



Tel: 514.737.9701 / Toll Free: 888.275.4538

Fax: 514.342.3854 / toll free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com