

PD - PD R PS



10" x 20" Panini grills







non-stick, no peel, no chip ceramic coated plates

- Sirman panini grills feature a non-stick ceramic material that not only is very easy to clean after cooking but is extremely tough and long-lasting. It won't chip or peel, and should last as long as the unit itself.
- The fine grain cast iron plates provide even and fast heat distribution and recovery
- · Well-suited for high volume operations
- Expand your kitchen capabilities by providing multiple menu options all in one small footprint
- Increase sales and profits and keep costs and maintenance low!
- PD R PS features removable grooved top and bottom plates

Features

- The self-balancing top cooking surface allows for easy opening and closing, and stays in place.
- The hinge mechanism can be simply adjusted with an Allan key (not supplied) without removing the spring cover.
- The 9 oz. capacity grease receptacle is front-mounted and easily removable thanks to two handles.
- The spring cover is removable for accessibility.
- The scraping brush is standard.

Specifications

Construction: S/steel body with ceramic coated cast iron plates.

Cooking temperature: Up to 570° F (300° C).

Electrical: 220V AC, 60Hz, 15.7A, 3000W (220V, 50Hz available on request). Plug and Cord: Attached plug, flexible, 3 wire SJT AWG14, 5' long cord.

Controls: One thermostat with off position.

Heating elements: Two: shock-proof, coated.

Grill area: 20"L (20 3/4"L PD R PS) x 10"W bottom plate.

Two (2) x 10"L x 10"W self-adjusting top plates.

Timer: Up to 15 min.



SIRMAN USA, Inc. 9490 Franklin Avenue Franklin Park, IL 60131 U.S.A. Toll free: 866-643-6872

Phone: +1 847-288-9500 Fax: +1 844-836-7076




www.paninigrill.com



Choice of the following work surfaces styles:
R version: grooved top and bottom
L version: grooved top and flat bottom
LL version: flat top and bottom
M version: grooved top and half flat half grooved bottom



Flat cooking surfaces

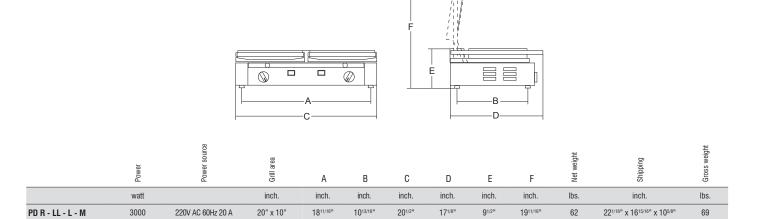

1013/16"

201/2"

PD R PS

1911/16"

62

171/8"

220V AC 60Hz 20 A

20^{3/4}" x 10"

1811/16"

3000

66

221/16" x 1615/16" x 105/8"