

IP 80 XP BA IP 120 XP BA IP 180 XP BA

Meat mixers, floor



- 170, 260 and 397 lbs. double paddle mixers allow for a fast, homogenous yet gentle mix of a variety of products - from sausage meat to potato salad, coleslaw and sandwich fillings - with great sales appeal and longer shelf-life
- Complete stainless steel construction
- Forward and reverse mixing action allows for more control over the most delicate products
- Paddles are easily removed for cleaning
- Tilting tub for easy product discharge and cleaning

Features

Technical

- Completely made from stainless steel.
- Stainless steel paddles for a thorough mixing and a faster kneading.
- Stainless steel tub tilts for easy product emptying
- Fast cleaning and maintenance

Safety

- A safety interlock stops the machine when opening the lid.
- Overload and no volt release protection

Sanitary

- Removable paddles for an easy and accurate cleaning.

Specifications

Motor IP 80:

1.5 Hp (1100W), fan-cooled.

Motor IP 120:

3 Hp (2250W), fan-cooled.

Motor IP 180:

3 Hp (2250W), fan-cooled.

Electrical IP 80:

220V AC, 60Hz, Single Phase, 3 Amps

Electrical IP 120:

220V AC, 60Hz, 3Phase, 4.5 Amps

Electrical IP 180:

220V AC, 60Hz, 3Phase, 4.5 Amps

Plug and Cord:

Attached, flexible, 3 wire or 4 wire (3PH+1G) SJT 14 AWG, 6'4" long cord.

IP 80: NEMA 6-15 P

IP 120-180: 3Phase hardwired, NEMA15-20 P

ON/OFF/REV stainless steel keypad, IP 67 waterproof protection.

No voltage release.


Use 5 min. ON / 30 min. OFF

Controls:



Certified to UL Standard 763
Certified to CSA Standard C22.2

Meat processors

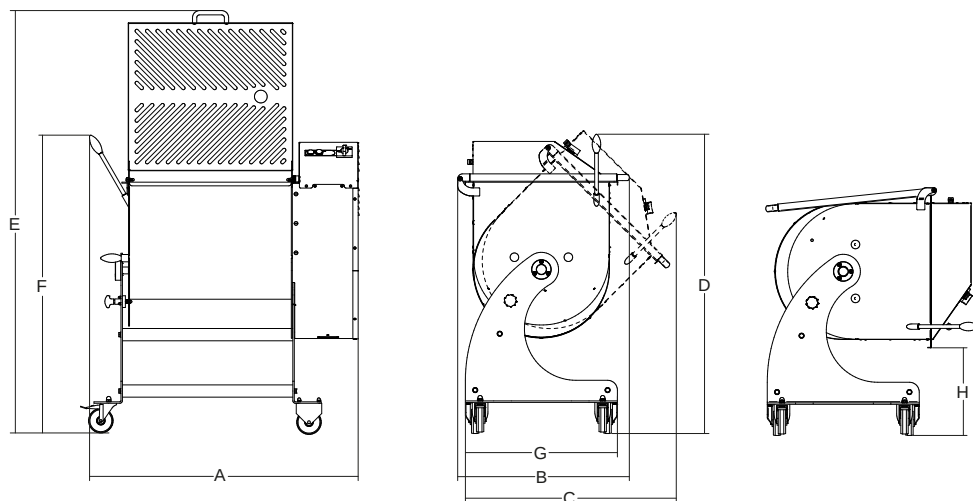

	Power	Power source +/- 10%	Tank dimensions	Capacity	A	B	C	D	E	F	G	H	Net weight	Shipping	Gross weight
	watt/Hp		inch.	lbs.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
IP 80 XP BA	1100/1.5	230V, 60Hz 1-ph	24 ^{13/32} " x 19 ^{11/16} "	170	41 ^{7/32} "	24 ^{51/64} "	28 ^{47/64} "	41 ^{27/32} "	65 ^{15/32} "	48 ^{1/32} "	19 ^{11/16} "	18 ^{27/64} "	198	32" x 48" x 60"	242
IP 120 XP BA	2250/3	230V, 60Hz 3-ph	25 ^{63/64} " x 21 ^{21/32} "	260	43 ^{5/32} "	27 ^{9/16} "	33 ^{21/32} "	48 ^{5/64} "	67 ^{19/32} "	47 ^{19/32} "	24 ^{13/32} "	14 ^{1/16} "	304	58" x 30" x 52"	380
IP 180 XP BA	2250/3	230V, 60Hz 3-ph	39 ^{11/64} " x 21 ^{21/32} "	397	55 ^{63/64} "	27 ^{9/16} "	33 ^{21/32} "	48 ^{5/64} "	67 ^{19/32} "	47 ^{19/32} "	24 ^{13/32} "	14 ^{1/16} "	335	58" x 30" x 52"	420