



# REACH IN FREEZER

## D55F-GS2

Bottom Mounted / 2 Glass Door



### **i** TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz  
 Refrigerant R290  
 Type of Defrost Automatic  
 Interior Material Stainless Steel  
 Exterior Material Stainless Steel  
 Temperature Range °F 0 ~ -8°F  
 Compressor Power (HP) 2 1/2  
 Nema Config. NEMA5-15P



## PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8° degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.



## HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628


info@dukersusa.com

www.DukersUSA.com


# DETAILS & SPECIFICATIONS

## D55F-GS2

Front View

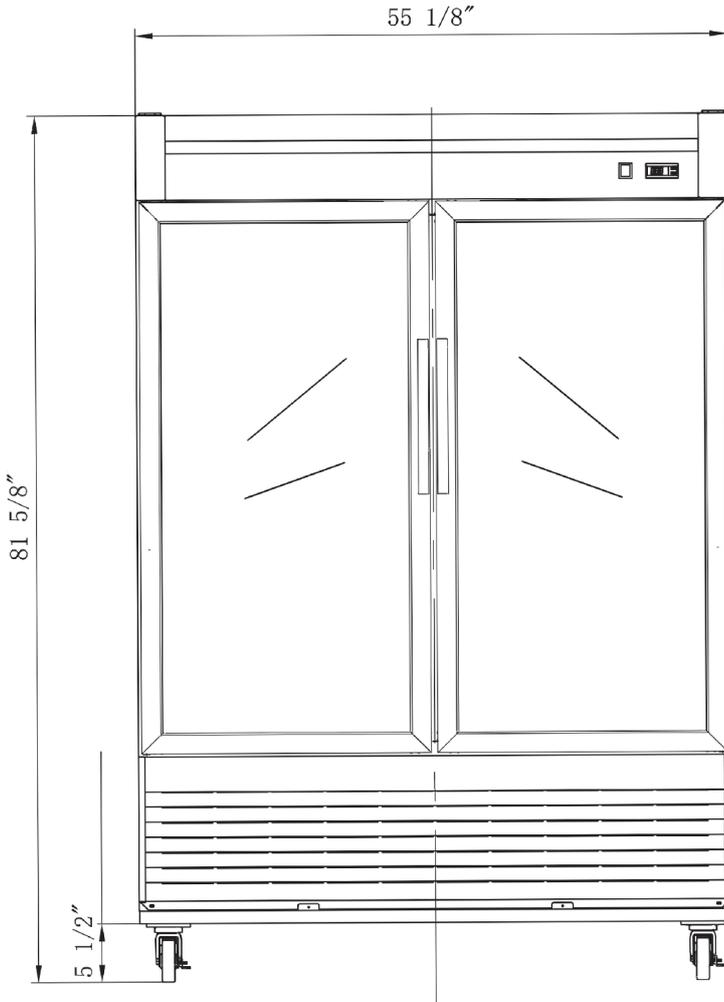

Side View

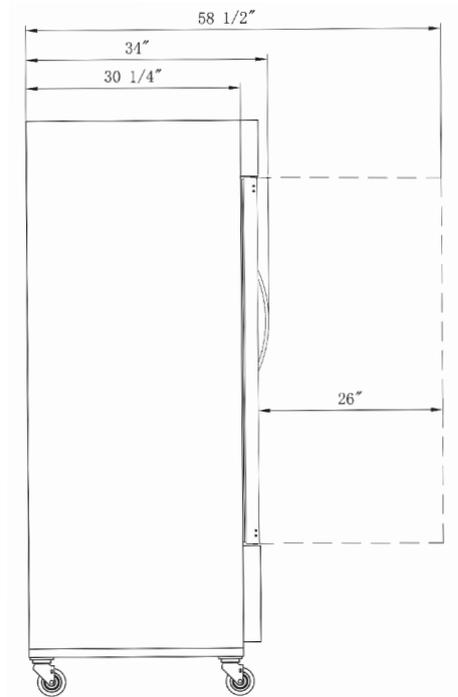

### MODEL D55F-GS2

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	1065W
Total Current	5.3A
Energy Consumption	14.7kW.h/24h
Total Capacity	40.74 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/8.82oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
D55F-GS2	55 1/8 x 34 x 80 3/8	56 3/4 x 36 5/8 x 84 3/8	506 lbs	8	21



AutoQuotes



115/60/1  
NEMA-5-15P



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com