

REACH IN REFRIGERATOR

D55R

Bottom Mounted / 2-Solid Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz Refrigerant R290 Interial Material Stainless Steel **Exterior Material Stainless Steel** Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/2 Nema Config. NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- 📆 Adjustable front locking casters.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628

(a) info@dukersusa.com


www.DukersUSA.com

DETAILS &SPECIFICATIONS

D55R

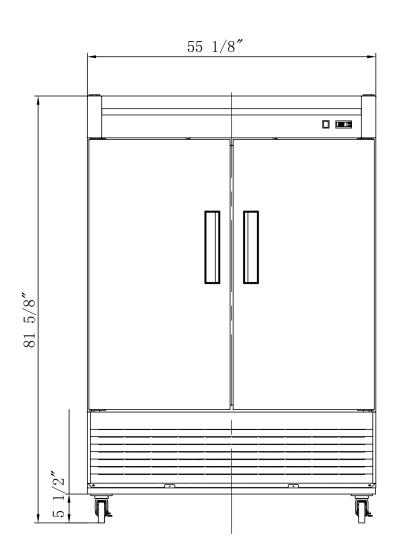

Side View



MODEL D55R Rated Voltage 115V **Rated Frequency** 60Hz 730W **Total Input Power Total Current** 8.6A **Total Capacity** 40.74 cu ft **Climatic Category** 4-5 **Protection Type 300 PSIG** Design Pressure High Side **150 PSIG Design Pressure Low Side Insulation Blowing Gas** C-Pentane R290/4.58 oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D55R	55 1/8 x 32 5/8 x 81 5/8	56 3/4 x 34 1/4 x 84 3/8	463 lbs	8	21















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



info@dukersusa.com
www.DukersUSA.com