




DCM-271BAH-OS



DCM-271BAH-OS
07/02/24
Item # 13574

OPTI-SERVE SERIES CUBELET ICE MACHINE AND WATER DISPENSER

W x D x H
165/8" x 24 1/4" x 31 3/4" *
*including 4" legs

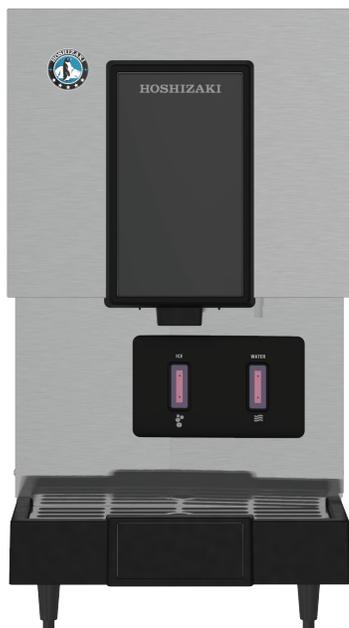

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.



Features

- ▶ Opti-Serve touchless ice and water
- ▶ 10 1/4" cup clearance
- ▶ Quieter operation
- ▶ ADA Compliant 

- Attractive modern design
- Easy to chew, Cubelet ice
- Up to 257 lbs. of ice production per 24 hours
- Built-in storage capacity of 0.3ft³/10 lbs. *
- Durable stainless steel drain pan grate
- Easy-cleaning removable spout
- 2-second flush cycle every hour
- Advanced CleanCycle24™ design 
- 6 ft. cord with a NEMA 5-15 plug
- R-404A Refrigerant

Warranty:

3 Year Parts & Labor on entire machine.
5 Year Parts on Compressor; air-cooled condenser coil.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.


*Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

Shipping: (LxWxH) 20.88" x 30.63" X 36.25" Volume: 13.42ft³

| Condenser | Model | ICE PRODUCTION | | WATER USAGE | | ELECTRICAL | | | | | | |
|------------|---------------|--|-----|---|---|---------------------------------------|------------------------------------|----------|-----------|------------------------------|------------------------------|-----------------------------|
| | | Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F | | Potable Gal. per 100 lbs. 90°/ 70°F | Condenser Gal. per 100 lbs. 90°/ 70°F | kWh Used per 100 lbs. 90°/ 70°F | Min. Circuit/ Max. Fuse Size | Amperage | Voltage | Heat Rejection BTU/hr. | Refrigerant Charge Amount | Net / Ship Weight (lbs.) |
| Air-Cooled | DCM-271BAH-OS | 257 | 196 | 12.0 | N/A | 6.9 | 15A | 8.5A | 115V/60/1 | 3,300 | 14.8 oz | 136 / 154 |

Power cord included.

Cubelet Dimensions*



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104 - 127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Allow 6" (15cm) clearance at rear and sides for proper air circulation and ease of maintenance and/or service should they be required. Allow 24" (61 cm) clearance at top to allow for removal of auger.

Not intended for outdoor use - avoid placement in direct sunlight.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- 3/4" MPT drain


Water Filter

Please refer to water filter specification sheet for recommendations.

Hoshizaki reserves the right to change specifications without notice.




DCM-271BAH-OS




DCM-271BAH-OS
07/02/24
Item # 13574

OPTI-SERVE SERIES CUBELET ICE MACHINE AND WATER DISPENSER


FRONT VIEW

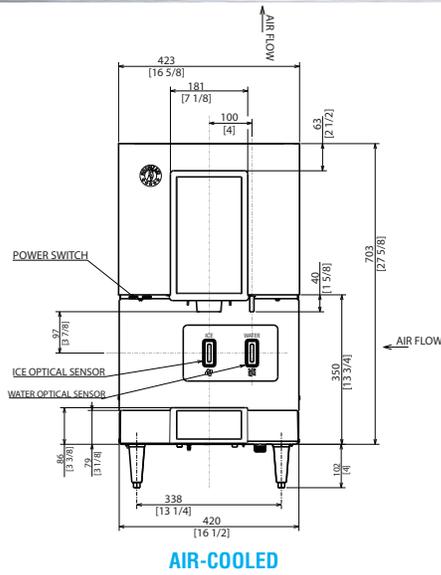



inch
[mm]

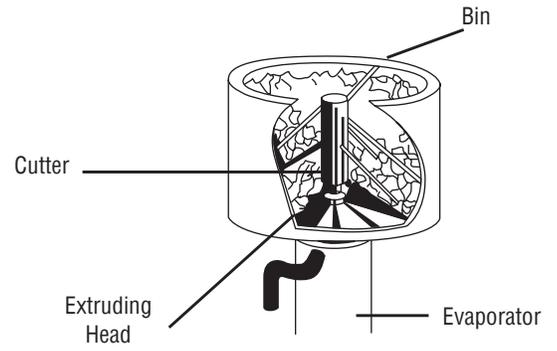

SIDE VIEW

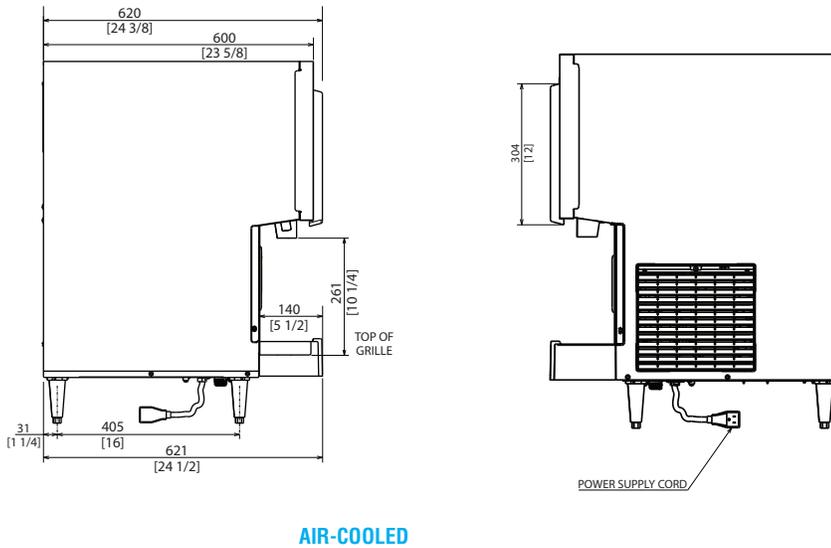

BOTTOM VIEW

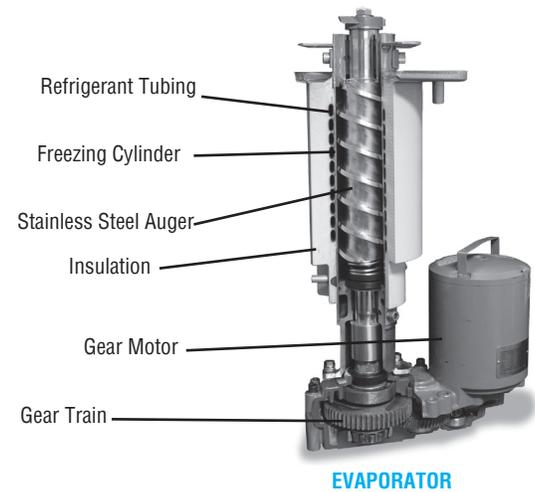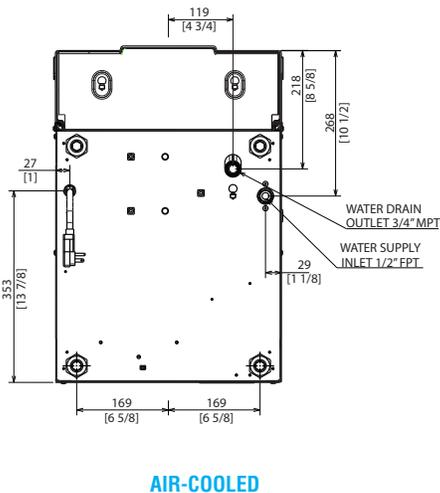

NOTE: DCM-271BAH-OS is made to pair with SD-271 stand. Placing a DCM-271BAH-OS on SD-270 stand will require a new drain hole to be cut.