



# **ICE MAKER**













### **Technical Specifications**

Rated Voltage

DIM-500A: 115V / 60Hz DIM-700A: 230V / 60Hz

**Ambient Temperature Range** Water Temperature Range Potable Water Pressure

35°F - 110°F 38°F - 90°F 138kPa-550kPa

Refrigerant **Fuse Rating**  R290 15A / 20A



Weight: 11g Water content: 2% Size:7/8" x 7/8" x 7/8"

#### Features & Benefits

 Flow-type vertical evaporator with an evaporation temperature of 0°F and an ice core temperature of 8°F.

TEARS PARTS & LA

FEAR COMPRE


- It remains fully operational at peak ambient air temperatures up to 110°F.
- Incorporates R290 / R410A refrigerant, which offers higher efficiency and is more environmentally friendly with a lower global warming potential.
- Equipped with an intelligent controller for automatic ice making and ice release. Features a uniquely designed evaporator for more efficient cleaning and includes a fault alarm system.
- All plastic interior plus 100% antimicrobial plastic liner.
- For cleaning, pour the cleaning solution into the water trough. The cleaning process requires approximately 35 minutes to complete.
- Designed for easy repair and maintenance, featuring removable air filter, water trough, and distribution tube for quick and efficient cleaning.
- Ideal for hotels, restaurants, coffee shops, convenience stores, beverage shops, and more providing rapid cooling for drinks.




Los Angeles | San Francisco | Dallas | Houston | Florida | Chicago | New Jersey | Colorado | Georgia 1-800-931-8628 (a) info@dukersusa.com www.DukersUSA.com

## **ICE MAKER**

#### -DIM-500A / 700A -

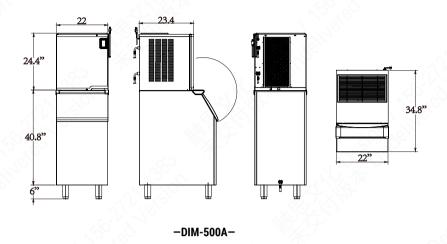

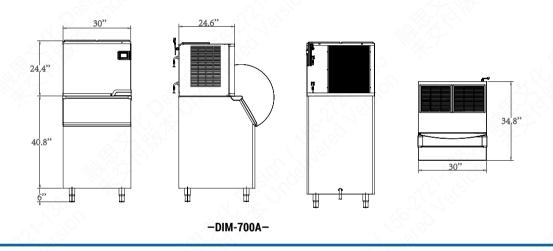

Model	External Dimensions (inches)			Ice Type	Ice Prpduction 24 Hours(Air/Water)					Gross Weight		Rated	BTU Per Hour	NEMA	Bin Storage
	W	D	н	,,,,,,	70 air/50 water	90 air / 70 water	(Kwh/100lbs)	(Usage/100lbs)	(lbs)	(lbs)	Power	Current		Config.	(lbs)
DIM-500A	22	34.8	71.2	Cube	496 lbs	400 lbs	4.9	53L	121.7	140.2	Air- cooled 800W	Air- cooled 3.7A	3500(Average)	5-15P	352
DIM-700A	30				785 lbs	719 lbs	4.8	53L	164.9	176.4	Air- cooled 1000W	Air- cooled 4.5A	4500(Average) 5800(Peak)	6-20P	550









