



DUKERS
Quality Commercial Refrigeration



GLASS DOOR MERCHANDISER

DSM-12R

Single Glass Swing Door Refrigerator



i TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz
 Refrigerant R290
 Type of Defrost Automatic
 Interior Finish White
 Exterior Finish Black
 Temperature Range °F 33 ~ 40°F
 Compressor Power (HP) 1/2 & 1/4
 Nema Config. NEMA5-15P



PRODUCT FEATURES



The compressor is mounted in the bottom for better heat evaporation.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Interior and canopy LED light with switch on the right side to always show your products at their best



High quality coated stainless adjustable shelves prevent peel and rust.



Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628


@ info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

DSM-12R

Front View

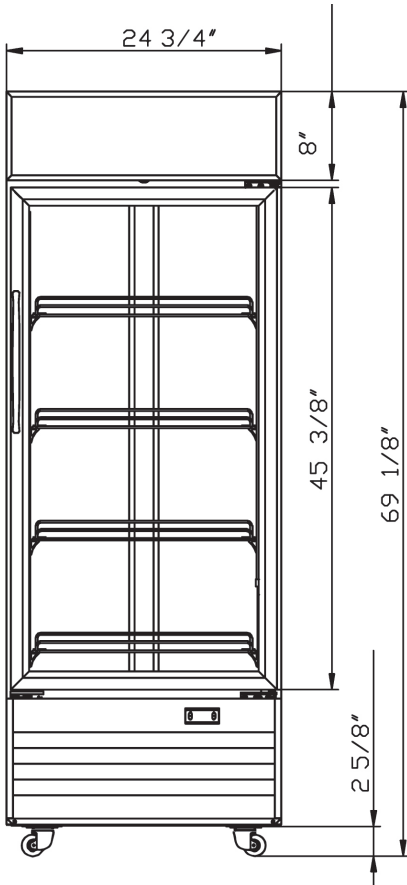

Side View

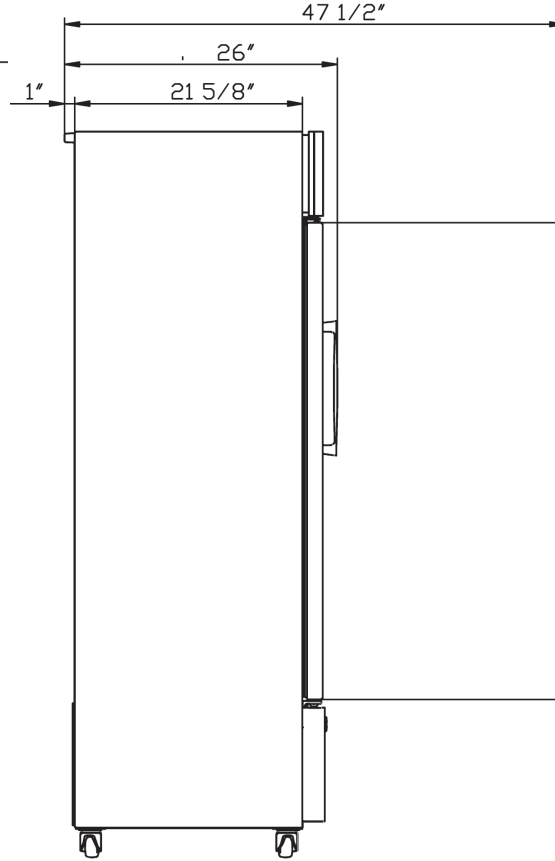

MODEL DSM-12R

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	235W
Total Current	2.1A
Total Capacity	11.47 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/2.64 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DSM-12R	24 3/4 x 26 x 68 1/8	27 3/8 x 27 1/8 x 71 1/8	204 lbs	4	51



AutoQuotes



115/60/1
NEMA-5-15P



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com