



DUKERS
Quality Commercial Refrigeration



GLASS DOOR MERCHANDISER

DSM-15R

Single Glass Swing Door Refrigerator



TECHNICAL SPECIFICATIONS

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Interior Finish	White
Exterior Finish	Black
Temperature Range °F	33 ~ 40°F
Compressor Power (HP)	1/2 & 1/4
Nema Config.	NEMA5-15P



PRODUCT FEATURES



The compressor is mounted in the bottom for better heat evaporation.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Interior and canopy LED light with switch on the right side to always show your products at their best



High quality coated stainless adjustable shelves prevent peel and rust.



Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628


info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

DSM-15R

Front View

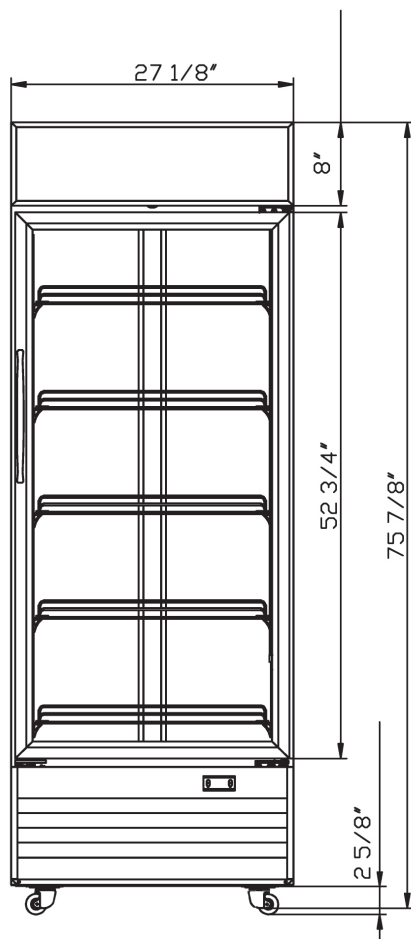

Side View

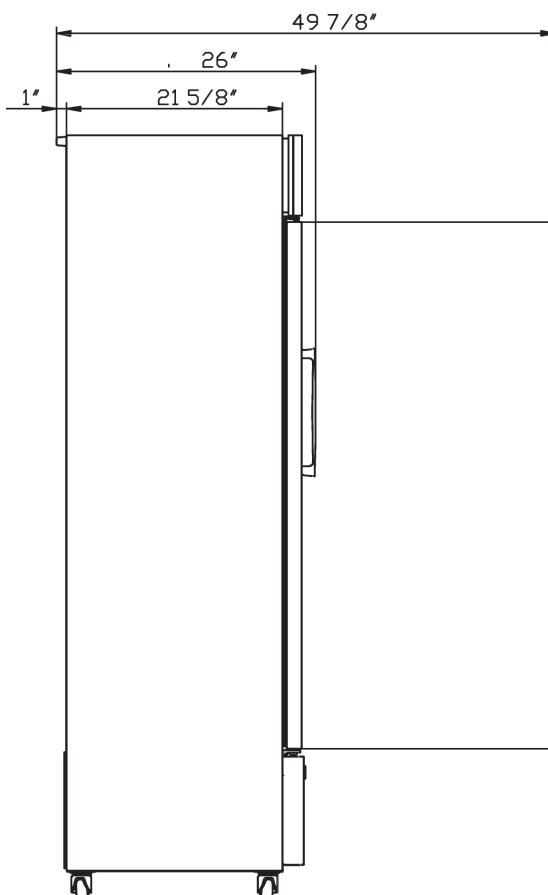

MODEL DSM-15R

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	260W
Total Current	2.3A
Total Capacity	14.72 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/2.82 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DSM-15R	27 1/8 x 26 x 76 3/8	28 1/2 x 27 x 80 1/8	241 lbs	5	51



AutoQuotes



115/60/1
NEMA-5-15P



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com