



**DUKERS**  
Quality Commercial Refrigeration



## GLASS DOOR MERCHANDISER

DSM-68SR

3-Glass Sliding Door Refrigerator



### TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz  
Refrigerant R290  
Type of Defrost Automatic  
Interior Finish White  
Exterior Finish Black  
Temperature Range °F 33 ~ 40°F  
Compressor Power (HP) 1/2 & 1/4  
Nema Config. NEMA5-20P



### PRODUCT FEATURES



The compressor is mounted in the bottom for better heat evaporation.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Interior and canopy LED light with switch on the right side to always show your products at their best



High quality coated stainless adjustable shelves prevent peel and rust.



Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



**HIGH QUALITY  
STAINLESS STEEL &  
ROBUST DESIGN**



**DUKERS**

Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

 1-800-931-8628


 [info@dukersusa.com](mailto:info@dukersusa.com)

[www.DukersUSA.com](http://www.DukersUSA.com)


# DETAILS & SPECIFICATIONS

## DSM-68SR

Front View

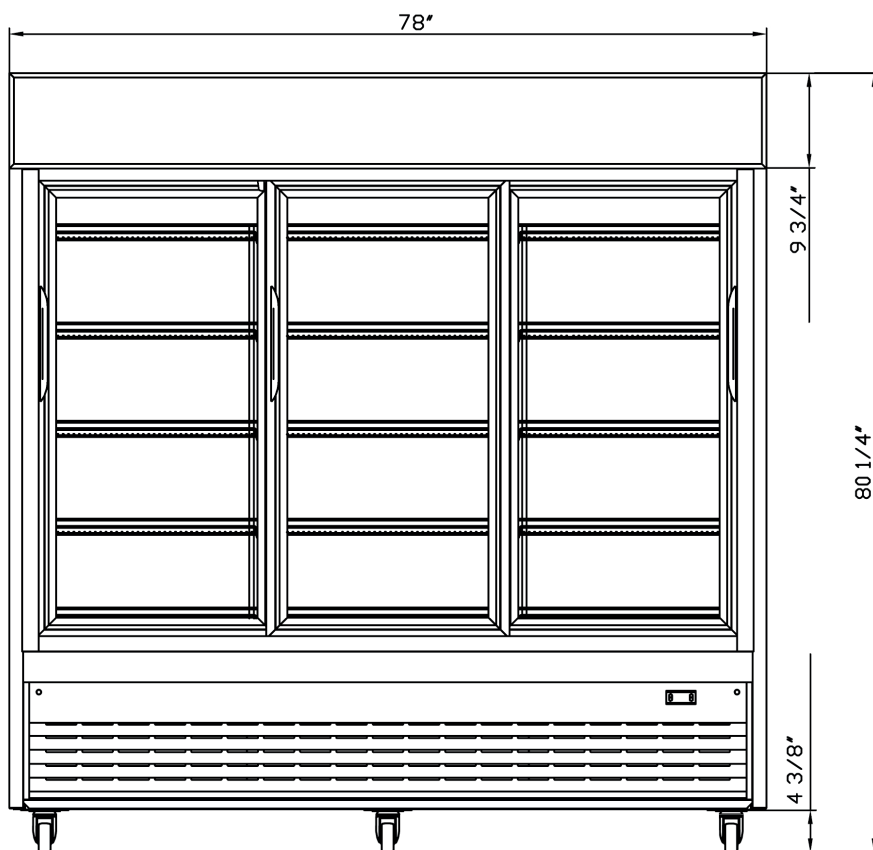

Side View

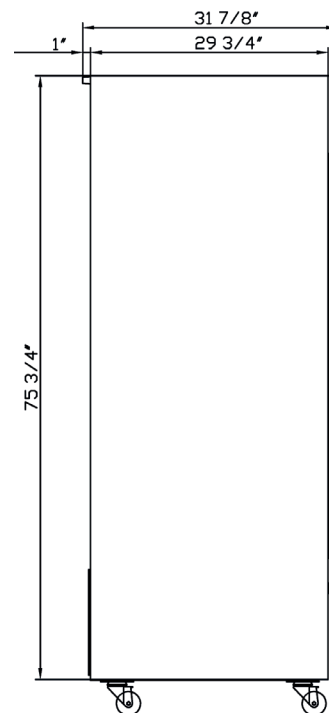

### MODEL DSM-68SR

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	823W
Total Current	7.40A
Total Capacity	69 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DSM-68SR	78 x 31 7/8 x 80 3/8	79 1/3 x 33 x 83 1/4	528 lbs	15	14



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com