

DSM-69R

3-Door / Glass / Swing / Refrigerator



### TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz

Refrigerant R290 Type of Defrost Automatic Interior Finish White Exterior Finish Black

Temperature Range °F 33 ~ 40°F Compressor Power (HP) 1/2 & 1/4 Nema Config. NEMA5-15P



### **PRODUCT FEATURES**

- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ★ Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Interior and canopy LED light with switch on the right side to always show your products at their best
- High quality coated stainless adjustable shelves prevent peel and rust.
- Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN** 




Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


(a) info@dukersusa.com

www.DukersUSA.com

# **DETAILS &**SPECIFICATIONS

## DSM-69R

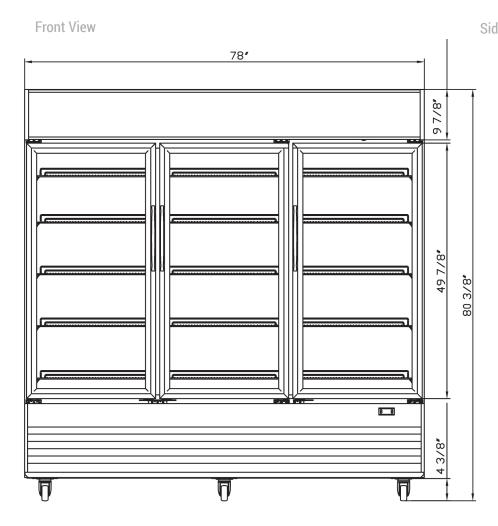

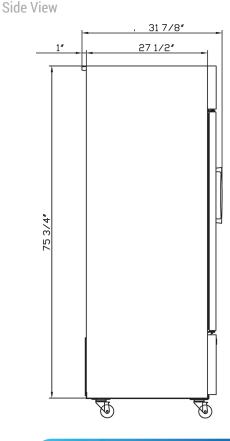

#### **MODEL DSM-69R**

Refrigerant

Rated Voltage Rated Frequency
Total Input Power
Total Current
Total Capacity
Climatic Category
Protection Type
Design Pressure High Side
Design Pressure Low Side
Insulation Blowing Gas

60Hz 602W 6.02A 69.43 cu ft 4-5 I 300 PSIG 150 PSIG C-Pentane R290

115V

	DDGUD MEMBER
	PROUD MEMBER
	CEESA
Commercia	Legal Fauinment Service Association













MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
DSM-69R	78 x 31 7/8 x 80 3/8	79 1/3 x 32 1/2 x 80 3/8	506 lbs	15	14



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



info@dukersusa.com

www.DukersUSA.com