

# UNDERCOUNTER REFRIGERATOR

MODEL DUC29R-D2 2-Drawers



### TECHNICAL SPECIFICATIONS

Voltage/Frequency Refrigerant R290
Type of Defrost Automatic
Interial Material Stainless Steel
Exterior Material Stainless Steel
Temperature Range °F 33 ~ 41°F
Compressor Power (HP) 1/5
Nema Config. NEMA5-15P



#### **PRODUCT FEATURES**

- The back mount compressor structure is placed in the coolest possible area, provides quick and easy service.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit.
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant, prometes faster cool down and efficient energy consumption.
- ☐ Drawers hold 6" deep food pans (not included) with heavy-duty, high-capacity slide rails.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey **(**) 1-800-931-8628


info@dukersusa.com


www.DukersUSA.com

## DETAILS & SPECIFICATIONS

#### **UNDERCOUNTER DUC29R-D2**



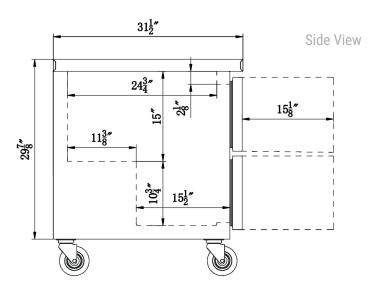



### MODEL DUC29R-D2

Rated Voltage	115V	
Rated Frequency	60Hz	
Total Input Power	225W	
Total Current	2.0A	
Total Capacity	6.99 cu ft	
Climatic Category	4-5	
Protection Type	1	
Design Pressure High Side	300 PSIG	
Design Pressure Low Side	150 PSIG	
Insulation Blowing Gas	C-Pentane	
Refrigerant	R290/2.82 oz	

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	DRAWERS	CONTAINER CERT.
DUC29R-D2	29 1/8 x 31 1/2 x 36	30 1/2 x 33 1/8 x 39 3/8	158 lbs	2	84

Important: a) Depth does not include 1" for rear bumpers. b) Height does include casters.





20"











Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

