



DUKERS
Quality Commercial Refrigeration



UNDERCOUNTER REFRIGERATOR

MODEL DUC36R-D2
2-Drawers



PRODUCT FEATURES

-  The back mount compressor structure is placed in the coolest possible area, provides quick and easy service.
-  Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
-  Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit.
-  Higher Resistance to dust, high quality condenser.
-  R290 Natural Refrigerant, promotes faster cool down and efficient energy consumption.
-  Drawers hold 6" deep food pans (not included) with heavy-duty, high-capacity slide rails.

HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



TECHNICAL SPECIFICATIONS

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Interior Material	Stainless Steel
Exterior Material	Stainless Steel
Temperature Range °F	33 ~ 41°F
Compressor Power (HP)	1/5
Nema Config.	NEMA5-15P



DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

 1-800-931-8628


 info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

UNDERCOUNTER DUC36R-D2


Front View

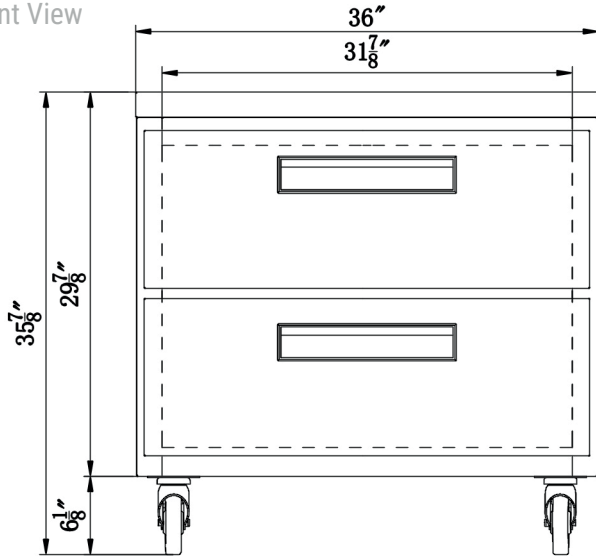


Side View

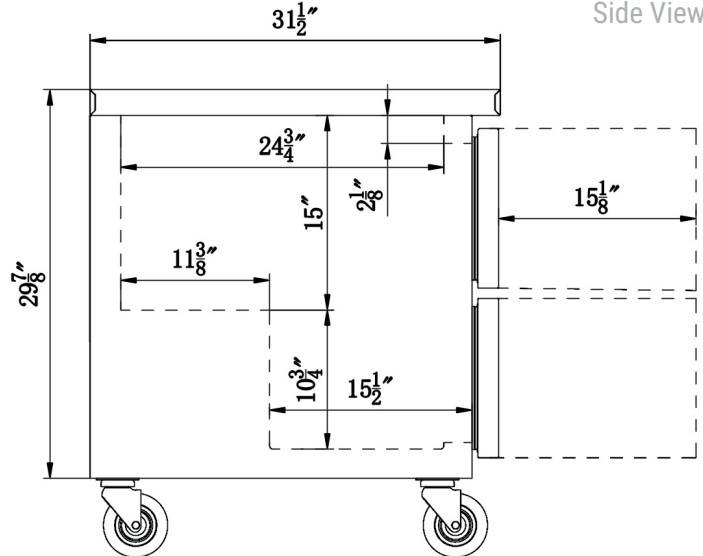

Upper drawer

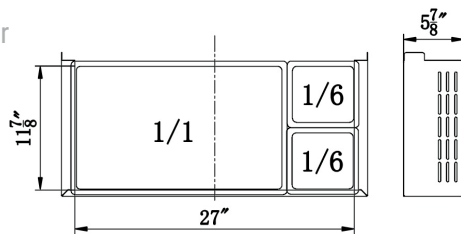

Lower drawer

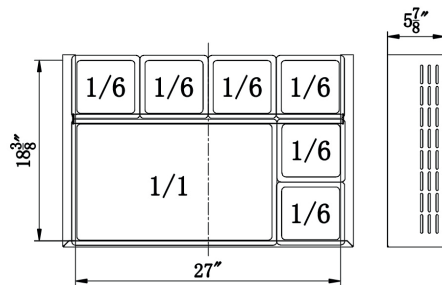

MODEL DUC36R-D2

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	280W
Total Current	2.4A
Total Capacity	9.6 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/3.17oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF DRAWERS	40HQ CONTAINER CERT.
DUC36R-D2	36 x 31 1/2 x 36	37 3/3 x 33 1/8 x 39 3/8	184 lbs	2	56

Important: a) Depth does not include 1" for rear bumpers. b) Height does include casters.



AutoQuotes



115/60/1
NEMA-5-15P



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com