



MODEL DUC36R







Voltage/Frequency
Refrigerant
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F
Compressor Power (HP)

115V/60Hz
R290
Automatic
Stainless Steel
Stainless Steel
33 ~ -41°F
1/5-

Nema Config. NEMA5-15P



PRODUCT FEATURES

The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.

SYEAR COMPRE

- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit.
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- ட்டு Lifetime warranty on hinges.
- 6" casters with lock for easy mobility.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

1-800-931-8628


info@dukersusa.com


www.DukersUSA.com

DETAILS & SPECIFICATIONS

UNDERCOUNTER DUC36R



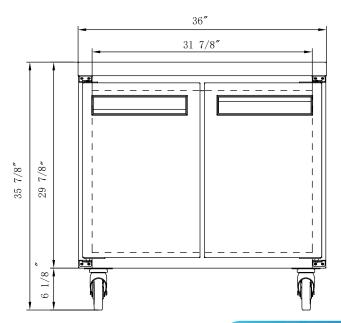

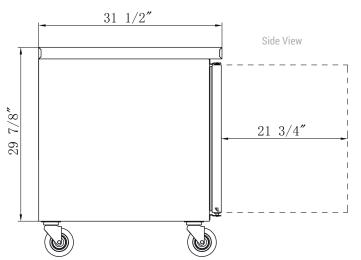

MODEL

Rated Voltage

R 115V

Rated Frequency **Total Input Power Total Current Total Capacity**

Climatic Category Protection Type

Design Pressure High Side

Design Pressure Low Side **Insulation Blowing Gas**

Refrigerant

60Hz 280W 2.4A

cu ft 4-5

300 PSIG

150 PSIG

C-Pentane R290/3.17oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DUC36R	36 x 31 1/2 x 36	37 3/8 x 33 1/8 x 39 3/8	184 lbs	2	56

















