

UNDERCOUNTER REFRIGERATOR

MODEL DUC60R-D4 4-Drawers



TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/5

Interial Material Stainless Steel Exterior Material Stainless Steel Nema Config. NEMA5-15P

PRODUCT FEATURES

- The back mount compressor structure is placed in the coolest possible area, provides quick and easy service.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit.
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant, prometes faster cool down and efficient energy consumption.
- ☐ Drawers hold 6" deep food pans (not included) with heavy-duty, high-capacity slide rails.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


(a) info@dukersusa.com www.DukersUSA.com


DETAILS & SPECIFICATIONS


UNDERCOUNTER DUC60R-D4

Side View

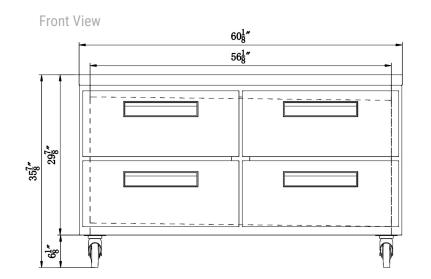







Rated Voltage 115V Rated Frequency 60Hz **Total Input Power** 280W **Total Current** 2.4A **Total Capacity** 15.53 cu ft 4-5 **Climatic Category Protection Type** Design Pressure High Side **300 PSIG** Design Pressure Low Side **150 PSIG Insulation Blowing Gas** C-Pentane Refrigerant R290/3.88oz

MODEL DUC60R-D4

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	DRAWERS	CONTAINER CERT.
DUC60R-D4	60 1/8 x 31 1/2 x 36	61 5/8 x 33 1/8 x 39 3/8	231 lbs	4	30

Important: a) Depth does not include 1" for rear bumpers. b) Height does include casters.















1-800-931-8628
info@dukersusa.com
www.DukersUSA.com