

## UNDERCOUNTER REFRIGERATOR

MODEL DUC72R-D6 6-Drawers





Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/3

Interial Material Stainless Steel Nema Config. NEMA5-15P



## **PRODUCT FEATURES**

The back mount compressor structure is placed in the coolest possible area, provides quick and easy service.

**PREMIUM** WARRAN1

FAR COMPRE

- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- \* Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit.
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant, prometes faster cool down and efficient energy consumption.
- ☐ Drawers hold 6" deep food pans (not included) with heavy-duty, high-capacity slide rails.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN




Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


(a) info@dukersusa.com


www.DukersUSA.com

## **DETAILS & SPECIFICATIONS**


## **UNDERCOUNTER DUC72R-D6**

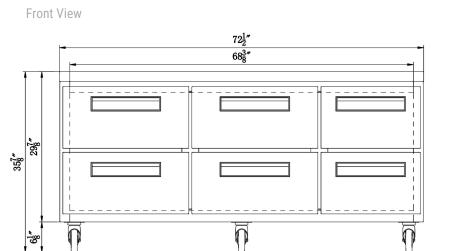





1/6



Upper drawer(right)

1/6

1/6



Side View

3.4A 18.96 cu ft 4-5 Design Pressure High Side **300 PSIG Design Pressure Low Side 150 PSIG** C-Pentane **Insulation Blowing Gas** R290/4.41oz Refrigerant

MODEL DUC72R-D6

115V

60Hz

380W

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	CONTAINER CERT.
DUC72R-D6	72 1/2 x 31 1/2 x 36	73 7/8 x 33 1/8 x 39 3/8	242 lbs	6	28

Important: a) Depth does not include 1" for rear bumpers. b) Height does include casters.















