

GDM Series, Remote, Swing Door, Reach-In Coolers



Features

- ▶ Remote Refrigeration Allows for Greater Capacity
- ▶ Full Vision Glass Door Provide Optimum Display
- ▶ Perfect for Dairy and Beverage Merchandising
- ▶ Energy Efficient, Self-Closing, Reversible Swing Doors
- ▶ Heated Door Frames
- ▶ Mirror Finish Stainless Steel Front
- ▶ Heavy Duty Construction for a Longer Life
- ▶ Full Length Lighting for Maximum Visibility
- ▶ Rigid Foamed Seals in Cold Temperature
- ▶ Forced Air Cooling Provides Through Circulation

Marc's GDM Reach-In Coolers



MODEL	HEIGHT	LENGTH	DEPTH	Self Size	No. of Doors	Apporx Cubic ft,	Recommended Condenser Unit HP	Electrical volts & amps	Approx. Shipping Weight
GDM 1	77 1/2"	30"	31 1/4"	4- 20x25	1	30	1/3**	115/1/60 - 2.5 amps†	450 lbs.
GDM 2	77 1/2"	54"	31 1/4"	8- 20x23 3/8	2	50	1/2**	115/1/60 - 4.8 amps†	600 lbs.
GDM 3	77 1/2"	78"	31 1/4"	12- 20x23 3/8	3	78	1/2**	115/1/60 - 6.8 amps†	750 lbs.
GDM 4	77 1/2"	101 3/4"	31 1/4"	16- 20x23 3/8	4	102	3/4**	115/1/60 - 8 amps†	900 lbs.
GDM 5	77 1/2"	126"	31 1/4"	20- 20x23 3/8	5	128	1**	115/1/60 - 10 amps†	1100 lbs.
GDM 6	77 1/2"	150"	31 1/4"	24- 20x23 3/8	6	160	1 1/2**	115/1/60 - 14 amps†	1400 lbs.

NOTE: 30' Doors available - Add 6' per door for length - Call for pricing.
(*) This size condenser unit is installed on this model.

(**)This size condenser unit is **RECOMMENDED** for this model. Consult a competent refrigeration mechanic to determine the appropriate size for your specific application. The appropriate condenser size will vary depending on length of run, indoor/outdoor use, etc. † Electrical load and requirements for ligths and fans.

Only Marc offers these kind of features STANDARD!!!!

- ▶ **Quality Construction For Longer Life**
Mirror finish, stainless steel front provides for a beautiful, easy to clean exterior surface. The bright white aluminum interior allows maximum light reflection and higher visibility. A stainless steel bottom pan, along with heavy gauge steel frame, insures years of dependable, rust resistant service.
- ▶ **Self- Closing Swing Doors Offer Energy Efficiency**
Designed to visually merchandise your investment, the reversible swing glass doors permit energy efficiency along with full vision display. Multi-pane thermoglass is used to protect against loss of temperature and moisture penetration. The self-closing mechanism makes certain that the doors are thoroughly closed after each opening. Also features a heated frame.
- ▶ **Full Length Lighting Provides Maximum Visibility**
Advanced product merchandising techniques are utilized in the lighting array. Each product facing features high illumination, full length fluorescents for maximum visibility of products.
- ▶ **Rigid Insulation Seals in Cold Temperature**
Rigid fiberglass insulation supplies excellent protection against ambient temperature incursion. It is further sealed to insure that there is no moisture infiltration.
- ▶ **Remote Refrigeration Offers Greater Capacity**
The forced air cooling method enables through circulation throughout the entire cabinet. Using remote refrigeration maximizes storage capacity while allowing a reduction of compressor heat with in the immediate area.

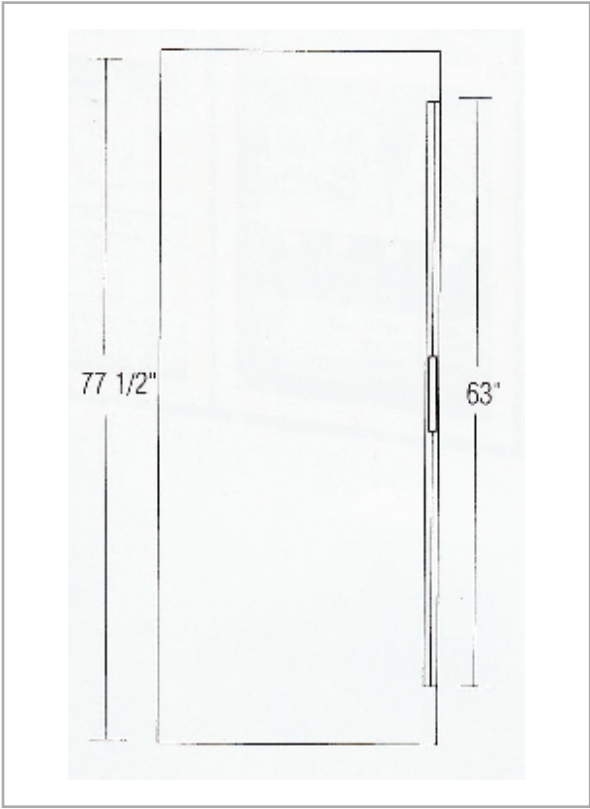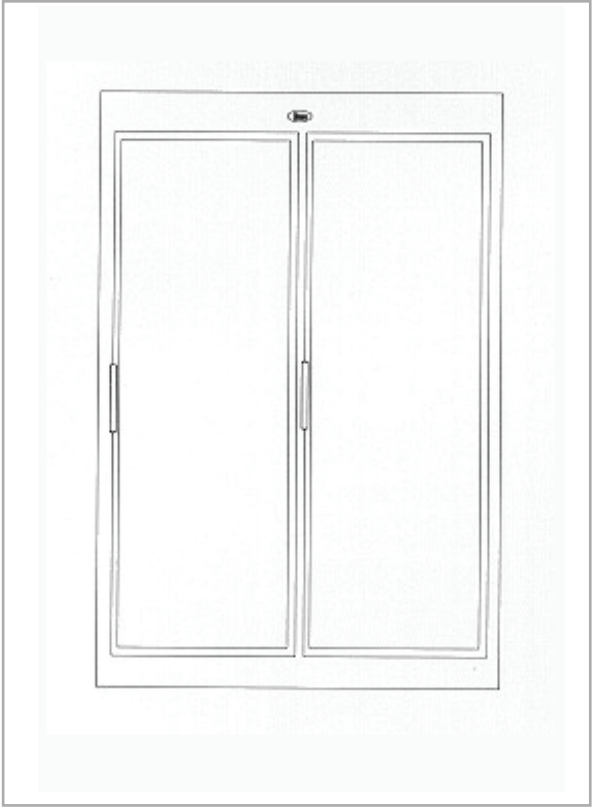

We reserve the right to change the specifications without notice.