

## MODELS

KFM-FG-(40, 50, 60, 80, 100, 120)-S

KFM-FG-(40, 50, 60, 80, 100, 120)-R

**FLAT GLASS DELI CASE  
DESIGNED FOR FRESH MEAT**

CASE HOLDS 33°F TO 40°F • LOW VELOCITY FORCED AIR REFRIGERATION MAINTAINS HIGH HUMIDITY  
TEMPERED TILT OUT FLAT FRONT GLASS • TEMPERED SIDE GLASS & REAR SLIDING DOORS  
CASES CAN BE MULTIPLEXED



AUTODESK®  
REVIT®

| SELF CONTAINED | Model        | O.A. Length (inches) | Volume FT³ | Electrical 115 Volts |       |                  |          |            | NEMA 115 V Plug | Weight lbs |            | Crate Size (inches) |    |    |
|----------------|--------------|----------------------|------------|----------------------|-------|------------------|----------|------------|-----------------|------------|------------|---------------------|----|----|
|                |              |                      |            | Compressor           |       | LIGHTS Fans HTRS | EVAP PAN | Total Amps |                 | No Crate   | With Crate | L"                  | W" | H" |
|                |              |                      |            | H.P                  | F.L.A |                  |          |            |                 |            |            |                     |    |    |
|                | KFM-FG-40-S  | 40.4                 | 15.35      | 3/8                  | 8.4   | 0.95             | 3.3      | 12.68      | 5-15P           | 350        | 512        | 48                  | 44 | 42 |
|                | KFM-FG-50-S  | 52.2                 | 20.22      | 1/2                  | 9.6   | 0.96             | 3.3      | 13.89      | 515P            | 399        | 582        | 59                  | 44 | 42 |
|                | KFM-FG-60-S  | 60                   | 23.47      | 1/2                  | 9.6   | 1.08             | 3.3      | 14.01      | 5-15P           | 451        | 650        | 67                  | 44 | 42 |
|                | KFM-FG-80-S  | 77.5                 | 30.70      | 5/8                  | 8.9   | 1.68             | 3.3      | 13.91      | 5-15P           | 561        | 825        | 85                  | 44 | 42 |
|                | KFM-FG-100-S | 101.2                | 40.45      | 3/4                  | 16    | 1.81             | 3.3      | 21.14      | N/A             | 695        | 974        | 109                 | 44 | 42 |
|                | KFM-FG-120-S | 117                  | 46.95      | 3/4                  | 16    | 2.06             | 3.3      | 21.39      | N/A             | 830        | 1204       | 124                 | 44 | 42 |


| REMOTE       | Model        | O.A.<br>Length (inches) | 115 Volts<br>Total Amps | B.T.U | Weight lbs  |               |
|--------------|--------------|-------------------------|-------------------------|-------|-------------|---------------|
|              |              |                         |                         |       | No<br>Crate | With<br>Crate |
|              | KFM-FG-40-R  | 40.4                    | 0.5                     | 2548  | 295         | 456           |
|              | KFM-FG-50-R  | 52.2                    | 0.51                    | 3015  | 344         | 526           |
|              | KFM-FG-60-R  | 60                      | 0.63                    | 3159  | 397         | 595           |
|              | KFM-FG-80-R  | 77.5                    | 0.78                    | 4345  | 529         | 791           |
|              | KFM-FG-100-R | 101.2                   | 0.91                    | 5112  | 642         | 919           |
| KFM-FG-120-R | 117          | 1.16                    | 5472                    | 765   | 1138        |               |

## STANDARD FEATURES

CFC free injected foam insulation  
Stainless steel interior  
Stainless steel rear work bench  
Silver colored PVC coated steel front panel  
Black steel kick plate  
Foamed polystyrene black end panels  
Tempered tilt-forward front glass  
Removable rear tempered glass sliding doors  
LED lighting in canopy  
Temperature and defrost regulated by a digital controller  
Removable condensate evaporating pan for easy cleaning on self contained units  
Slide out condensing unit on self-contained units  
Digital thermometer  
Levelling feet

## OPTIONAL FEATURES

Stainless steel exterior  
Other colors available  
Joining Kit  
Partition  
Condensate evaporating pan for remote cases  
White epoxy bi-level wire racks; 2 or 3 level step sham  
Scale stand with receptacle  
Cutting board  
Knife Support  
Casters add 4-3/8" to height  
Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

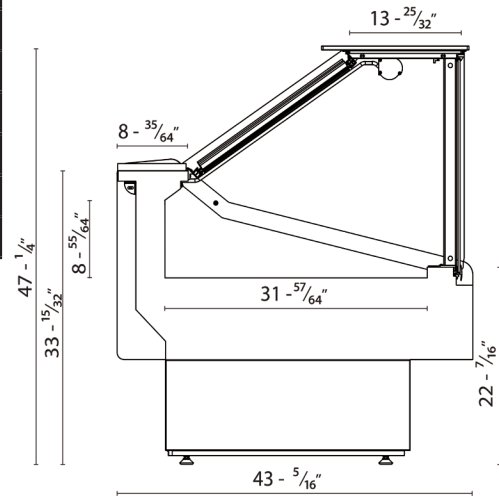

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

## NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

## WARRANTY

One year parts and labor with an additional four years on the compressor (part only)



Tel: 786.600.4687 / Toll Free: 844.218.8477

Fax: 786.661.4100



Tel: 514.737.9701 / Toll Free: 888.275.4538

Fax: 514.342.3854 / toll free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com