



MODELS

KGV-MD-(2, 3, 4, 5, 6)-R

**HIGH VOLUME GRAB-N-GO CASE
FOR REMOTE CONDENSING UNIT**

CASE HOLDS 33°F TO 40°F • FORCED AIR REFRIGERATION • FRONT LOADING
LED LIGHTING IN CANOPY AND UNDER SHELVES
CASES CAN BE MULTIPLEXED



AUTODESK®
REVIT®



HIGH VOLUME GRAB-N-GO CASE FOR REMOTE CONDENSING UNIT

| REMOTE | Model | Number of Doors | O.A. Length (inches) | Volume FT ³ | Total Amps | BTUS | Weight lbs | | Crate Size (inches) | | |
|--------|------------|-----------------|----------------------|------------------------|------------|------|------------|------------|---------------------|----|----|
| | | | | | | | No Crate | With Crate | L" | W" | H" |
| | KGV-MD-2-R | 2 x 23-1/2 | 51.5 | 37.63 | 1.43 | 3345 | 555 | 763 | 54 | 37 | 85 |
| | KGV-MD-3-R | 3 x 23-1/2 | 75.4 | 56.37 | 2.19 | 4430 | 773 | 1040 | 78 | 36 | 85 |
| | KGV-MD-4-R | 4 x 23-1/2 | 99.4 | 75.26 | 2.86 | 6811 | 1110 | 1526 | 104 | 36 | 85 |
| | KGV-MD-5-R | 5 x 23-1/2 | 123.2 | 94 | 3.62 | 7795 | 1328 | 1803 | 126 | 36 | 85 |
| | KGV-MD-6-R | 6 x 23-1/2 | 147 | 112.73 | 4.38 | 9397 | 1546 | 3052 | 150 | 36 | 85 |


* Note for other lengths please contact MVP

STANDARD FEATURES

Silver colored PVC coated steel front panel
CFC free injected foam insulation
PVC coated steel gray interior
Black steel kick plate
Foamed polystyrene black end panels
Height adjustable shelves can be tilted
Product stops on all shelves
Temperature and defrost regulated by a digital controller
Levelling feet

OPTIONAL FEATURES

Other colors available
Stainless steel exterior and / or interior
Additional shelves
Price tag molding
Product dividers
Joining Kit
Partition

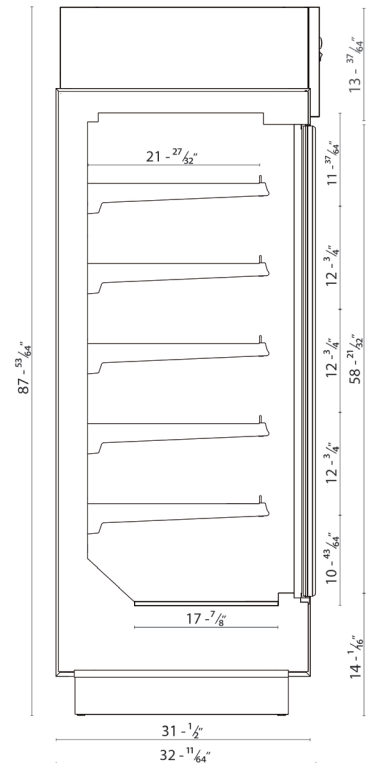

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-7/8" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Floor drain must be provided with an expansion valve and a liquid solenoid for pump down cycle. Cases must be hard wired – no plugs.



Tel: 786.600.4687 / Toll Free: 844.218.8477

Fax: 786.661.4100



Tel: 514.737.9701 / Toll Free: 888.275.4538

Fax: 514.342.3854 / toll free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com

06/2017



Hydra - Kool is a registered trademark of MVP Group Corp.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE