



REFRIGERATED REAR STORAGE

## MODELS

KPM-CG-(60, 80, 100)-S

KPM-CG-(60, 80, 100)-R

## CURVED GLASS DELI CASE DESIGNED FOR DELI PRODUCTS AND PACKAGED MEAT

CASE HOLDS 33°F TO 40°F • FORCED AIR REFRIGERATION • TEMPERED TILT-OUT CURVED FRONT GLASS  
TEMPERED SIDE GLASS AND REAR DOORS • REFRIGERATED REAR STORAGE  
CASES CAN BE MULTIPLEXED



Intertek



Intertek



AUTODESK<sup>®</sup>  
REVIT<sup>®</sup>

SELF CONTAINED	Model	O.A. Length (inches)	Volume FT³		Electrical 115 Volts					NEMA 115 V Plug	Weight lbs		Crate Size (inches)		
			Front	Rear	Compressor		LIGHTS Fans HTRS	EVAP Pan	Total Amps		No Crate	With Crate	L"	W"	H"
					H.P	F.L.A									
	KPM-CG-60-S	60	18.88	5.33	1/2	9.6	0.65	3.3	14.35	5-20P	470	692	67	44	42
	KPM-CG-80-S	77.5	24.70	8.76	1/2	9.6	1.59	3.3	14.52	5-20P	575	838	85	44	42
KPM-CG-100-S	101.2	32.54	13.41	5/8	8.9	1.80	3.3	14.23	5-20P	714	1032	108	44	42	


REMOTE	Model	O.A. Length (inches)	Number of Rear Doors	115 Volts Total Amps	B.T.U	Weight lbs	
						No Crate	With Crate
	KPM-CG-60-R	60	1	0.97	2959	414	637
	KPM-CG-80-R	77.5	2	1.14	3253	521	783
	KPM-CG-100-R	101.2	3	1.55	4372	659	977

#### STANDARD FEATURES

Tempered side glass  
CFC free injected foam insulation  
Silver colored PVC coated steel front panel  
PVC coated steel gray interior  
Black steel kick plate  
Foamed polystyrene black end panels  
Tempered tilt-forward front glass  
Rear work bench  
Removable rear tempered glass sliding doors  
Tempered glass inside shelf is NON-REFRIGERATED  
LED lighting in canopy  
Temperature and defrost regulated by a digital controller  
Removable condensate evaporating pan for easy cleaning on self contained units  
Slide out condensing unit on self-contained units  
Anti-condensate system for front glass  
Digital thermometer  
Levelling feet

#### OPTIONAL FEATURES

Lift up front glass  
Stainless steel interior and / or exterior  
Other colors available  
White epoxy bi-level wire racks; 2 or 3 level step sham  
Scale stand with receptacle  
Cutting board  
Knife support  
Joining Kit  
Partition  
Condensate evaporating pan  
Casters add 4-3/8" to height  
Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

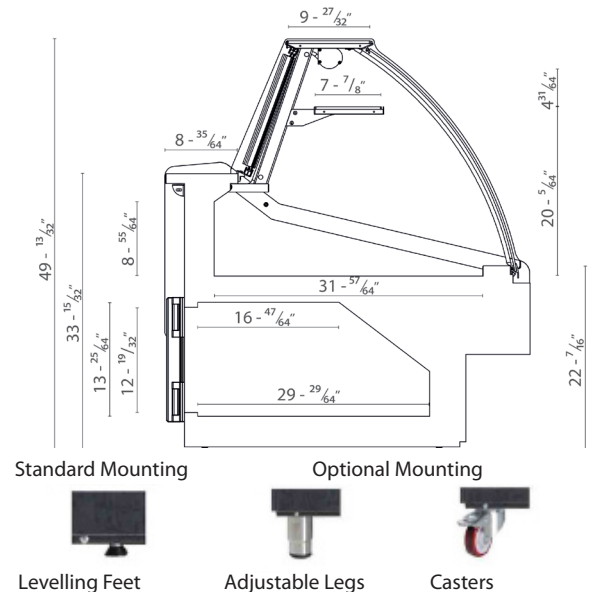

#### NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U's are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

#### WARRANTY

One year parts and labor with an additional four years on the compressor (part only)