

## Split Tank GAS FRYERS

### Features

- The Kona Gas Fryer line has a tube heat exchange design that incorporates fast temperature recovery and large cold zone.
- 30,000 BTU / burner
- Models: 4 tubes, 2 split tanks.
- 2 set individual gas control system for 2 split tanks.
- Millivolt (snap action) thermostat, 200°F - 400°F
- Stainless steel front and door
- Sides and back are galvanized steel
- Large cold zone to trap food particles
- 1 -1/4" dia full port drain valve for fast and complete oil draining
- Four 5" casters standard, Stainless Steel legs optional
- Tank is fully peened for smoother welds & easy cleaning
- Drain pipe holder attached to inside door
- Twin nickel plated baskets




NJGFD-40LP





## Split Tank GAS FRYERS

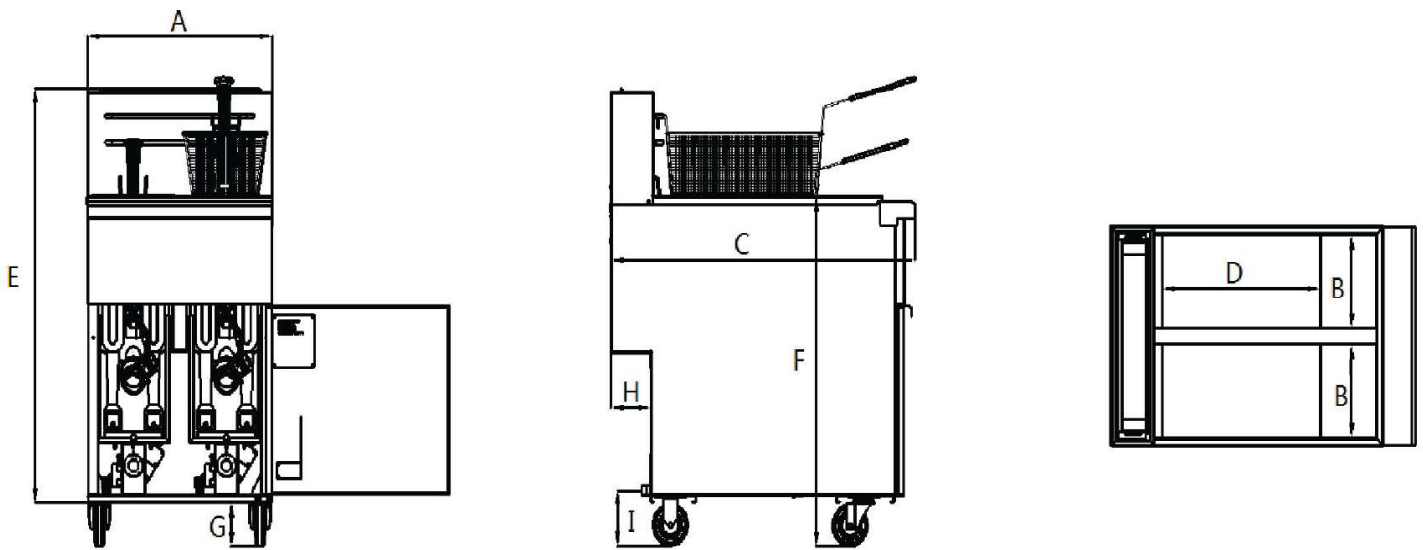

Legs adjustable from 6" - 7 1/2" total leg height.

### Specifications



Model	Width		Depth		Height		Clearance			Weight	Shipping Dimensions	Ship. Weight
	A	B	C	D	E	F	G	H	I			
NJGFD-40NG	20.9" (53cm)	9" (22.8cm)	34.5" (87.6cm)	17.9" (45.5cm)	39.75" (101cm)	33.7" (85.6cm)	5.0" (12.7cm)	4.55" (11.6cm)	6.0" (15.2cm)	192 lbs (87kg)	22.1/2"W X 36.1/4"D X 33.1/2"H (57cm x 92cm x 85cm)	205 lbs (93kg)

Model	Oil Capacity	Number of Burners	Heat Tubes	Tube BTU's	Total BTU's
NJGFD-40LP	72 - 78 lbs	4	4	30,000	120,000

#### GAS REQUIREMENTS

- 3/4" NPT gas connection
- NG gas 4" W.C. ; LP gas 10"W.C.
- Units are not supplied with conversion kits.
- Gas type must selected before ordering