



**a Standex company**

ITEM: \_\_\_\_\_ PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

## REFRIGERATED SELF-SERVE HIGH PROFILE DAIRY MERCHANDISER

MODEL ☐ RSSD-478SC

☐ RSSD-678SC

☐ RSSD-878SC



*Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits. Available in lengths of 4', 6', and 8'.*


### STANDARD FEATURES

- Four tiers of adjustable white metal shelves with price tag molding. Shelves can be flat or slanted.
- Top mounted octron shielded light. Vertical lights optional.
- Choice of six standard laminates on exterior. Other color laminates optional. Black metal front grill and galvanized back.
- Silver trim, gold tone, and black optional.
- Stainless steel display deck, glass and white interior ends, white interior back panel.
- Automatic defrost.
- Energy saving night curtain.
- Condensate evaporator provided for a totally self-contained system.
- Insulated with high-density urethane foam.
- Continuous line-ups are available for remote applications.
- Refrigeration controls maintain 35° to 40°F.  
Note: Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from wall.
- Thermometer.

# REFRIGERATED SELF-SERVE HIGH PROFILE DAIRY MERCHANDISER

## OPTIONAL ACCESSORIES:

- |  |   |
|--|---|
| <input type="checkbox"/> Special Laminate                                | <input type="checkbox"/> Gold or Black Trim                                     |
| <input type="checkbox"/> Roll-up Security Cover or Removable Night Cover | <input type="checkbox"/> Black Interior   |
| <input type="checkbox"/> Wire Shelves in Lieu of Flat Metal              | <input type="checkbox"/> Casters (Self-Contained Models Only) Cord Included     |
| <input type="checkbox"/> Joining Kit for Continuous Line-ups             | <input type="checkbox"/> Cord & Plug (Self-Contained Models Only) (NEMA L14-20) |
| <input type="checkbox"/> Front Condensing Unit Air Discharger            | <input type="checkbox"/> Legs   |
| <input type="checkbox"/> Rear Access Doors                               | <input type="checkbox"/> Remote Refrigeration with Condensate Pump              |
| <input type="checkbox"/> Vertical End Lights                             | <input type="checkbox"/> Condensate Evaporator Assembly (Field Install)         |
|  | <input type="checkbox"/> Condensate Pump  |

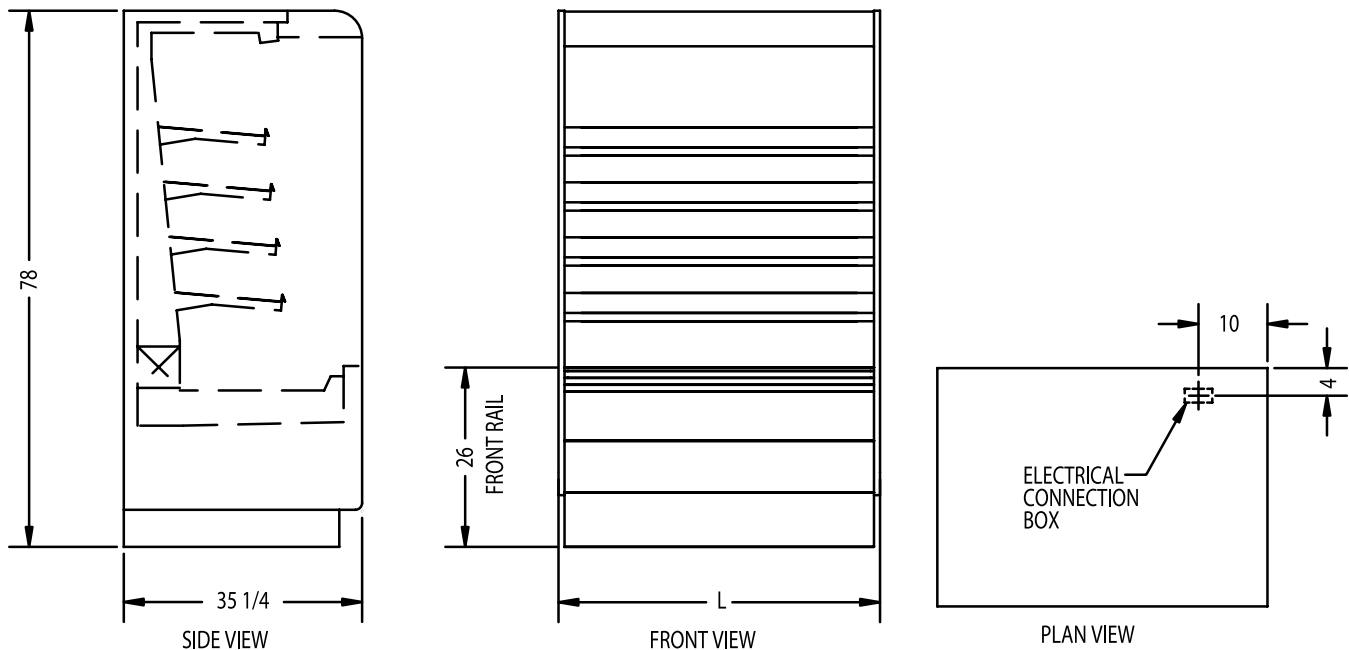

## SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Shelving	Self-Contained 3-Wire Plus Ground 120/208-240/60/1	Remote 120/60/1
<input type="checkbox"/> RSSD-478SC	47 1/4" x 34 1/4" x 78"	850	4 (15" x 45")	3/4 HP • 13 AMPS	4 AMPS
<input type="checkbox"/> RSSD-678SC	71 1/4" x 34 1/4" x 78"	1,220	8 (15" x 45")	1 HP • 15 AMPS	6 AMPS
<input type="checkbox"/> RSSD-878SC	91 3/16" x 34 1/4" x 78"	1,590	8 (15" x 45")	1.5 HP • 15 AMPS	8 AMPS

- Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall.
- Electrical Requirement - The minimum circuit ampacity and maximum fuse size is 20 amps.  
A 120/208-240 volt, 60 hertz, 1 phase, 3 wire plus ground power supply.
- Refrigerated cases are designed to operate in an environment of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



*The Signature of Quality*

**FEDERAL INDUSTRIES**  
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: [geninfo@federalind.com](mailto:geninfo@federalind.com)

FAX: 608-424-3234

WEBSITE: [www.federalind.com](http://www.federalind.com)

