



## HEAVY DUTY COUNTERTOP GLO-STONE CHARBOILER

□ BPHCRB-2424i □ BPHCRB-2436i □ BPHCRB-2448i □ BPHCRB-2460i □ BPHCRB-2472i



BPHCRB-2436i

### Standard Features

- Cast Iron top grates for broiling-floating rods or meat grates available at no charge.
- 20,000 BTU/HR per burner with individually operated controlled valves located every 5"
- Stainless steel burners feature flam guards – cast iron burners optional
- Up to 24,000 BTU/HR per broiler in natural or propane gas
- All stainless exterior front, unitized body constructions, and stainless steel radiant heat deflectors
- Low profile, countertop design – only 13 1/8" to broiling/ grilling surface.
- Stainless steel slide-pit grease drawer/water pan and 4" legs
- 3/4" (19mm) NPT rear gas connection

### Reliability backed by Bakers Pride Warranty

All Bakers Pride Heavy-Duty Cookline Equipment is backed by a 2 year limited warranty and 2 year on site labor warranty.

### Design Smart

Heavy-Duty Countertop Glo-Stone Charboiler with exceptional low profile design is only 13 1/8" (333mm) to broiler surface making the Heavy-Duty tall to range surface making them ideal for use on refrigerated cabinets and a 21 1/2" deep broiling surface.

Exterior front is all stainless steel with unique air blanket for ventilation and cooler outer temperatures. Front grease trough, slide out stainless steel water pan/grease drawer and 4" (102mm) chrome plated adjustable legs are standard. Interior combustion chamber is fabricated of 16 gauge CRS.

The HD models feature 24" long, 20,000 BTU/HR, independently controlled; clog-proof, high efficiency burners located every 5" (127mm) for maximum heat. Glo-Stone models add flame flare for richer flavor profile an dare ideal for exhibition kitchens.

Standard top grates are cast ion with channels to direct grease to front trough. Grates are 22 3/4" (578mm) long with 7/8" (22mm) rib spacing while several grate types are optional and may be mixed & matched at no additional charge. Each grate may be manually adjusted in any of three separate tilting positions.




### Options & Accessories

- Stainless steel front-mounted work deck with or without sauce pan cut-outs
- Richlite front mounted work deck with or without sauce pan cut outs
- Flame failure safety pilot and CE approval
- Stainless radiants, Glo-Stones, cast iron burners
- Gas connector hoses, removable griddle plates, overhead back shelves, grate lifters, condiment rail, and stainless steel equipment stands.


### Certifications



# HEAVY DUTY COUNTERTOP GAS OPEN BURNER RANGES

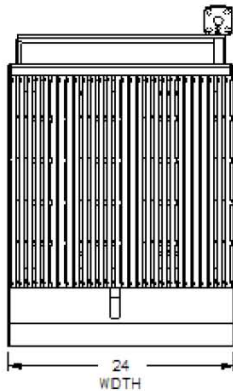

Heavy Duty Cookline  
Lava Rock Charbroiler  
Model BPHCRB-2424i



## PRODUCT SPECIFICATIONS

### Construction:

Stainless steel top skirt, grease trough, grease collector drawer, and front panel. Stainless steel radiant. Aluminized steel sides and back panel. 4" adjustable legs. Welded construction. Field convertible and adjustable gas regulator.

### Gas Information:

Natural or LP.

**Must specify type of gas and elevation if over 2000 ft. when ordering.**

### Gas Specifications:

BPHCRB-2424i	4 burners, 80,000 BTUH total
BPHCRB-2436i	6 burners, 120,000 BTUH total
BPHCRB-2448i	8 burners, 160,000 BTUH total
BPHCRB-2460i	10 burners, 200,000 BTUH total
BPHCRB-2472i	12 burners, 240,000 BTUH total

### Overall Dimensions:

BPHCRB-2424i	15 7/32"H x 24"W x 33 7/8"D
BPHCRB-2436i	15 7/32"H x 36"W x 33 7/8"D
BPHCRB-2448i	15 7/32"H x 48"W x 33 7/8"D
BPHCRB-2460i	15 7/32"H x 60"W x 33 7/8"D
BPHCRB-2472i	15 7/32"H x 72"W x 33 7/8"D

### Grilling Area Dimensions

BPHCRB-2424i	15 7/32"H x 24"W (38.7cm x 61cm)
BPHCRB-2436i	15 7/32"H x 36"W (38.7cm x 91.5cm)
BPHCRB-2448i	15 7/32"H x 48"W (38.7cm x 121.9cm)
BPHCRB-2460i	15 7/32"H x 60"W (38.7cm x 152.4cm)
BPHCRB-2472i	15 7/32"H x 70"W (38.7cm x 182.9cm)

### Shipping:

BPHCRB-2424i	193 lbs (88kg)
BPHCRB-2436i	264 lbs (120kg)
BPHCRB-2448i	335 lbs (176kg)
BPHCRB-2460i	543 lbs (246kg)
BPHCRB-2472i	613 lbs (373kg)

### Freight Class: 85

**FOB:** Standex Dock

*Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification*