



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax# 1-336-245-6453 http://www.Beverage-Air.com

CUSTOMER'S CHOICE FOR A HOT KITCHEN Tested & Certified to Ambient Class of 100°F

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

UCFD36 MODEL

Versatile, compact (29" depth) model for under the counter refrigerated storage of food products. Working height is 34 1/2".

CABINET CONSTRUCTION

Heavy duty construction includes exterior stainless steel on front, sides, drawers and grille. Cabinet back and bottom are galvanized steel. Interior liner is made of corrosion resistant aluminum. Interior thermometer is standard.

Cabinet insulation is CFC and HCFC-free foamed-in-place polyurethane of two-inch minimum thickness. 6" high casters are standard, 2 include brakes. 6" legs and 3" casters are available as options.

DRAWER CONSTRUCTION

Drawer frames are constructed of heavy-duty stainless steel and are supported on heavy-duty telescoping drawer slides for maximum support of stored food products. Slides have locking mechanism to prevent from drawers being pulled off of cabinets. Upper pull-out drawers accommodate 6" deep pans. Lower pull-out drawers accommodate two 4" deep pans. Heavy-duty pan divider supports are supplied. Foodservice pans for drawers are not included. Snap-type vinyl magnetic gasket is attached to each drawer for positive seal. Drawers extend 15 3/4" (when opened).

REFRIGERATION

Refrigeration system utilizes R404a refrigerant governed by a capillary tube system. Automatic (non-electric) condensate evaporator is provided. Interior forced-air system with high humidity evaporator coils, provides the ideal environment for food preservation.

ELECTRICAL

Units wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet. 8' long cord and plug set included.

SPECIAL FEATURES

Optional 6" legs or 3" casters available







UNDERCOUNTER FREEZERS WITH DRAWERS UCFD36

MODELS: UCFD36A



UCFD36A

ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.



Available From:

Model Specified	Store#
Location	Quantity



Standard Undercounter Freezer Cabinet Models: UCFD36A

MODEL	UCFD36A	
EXTERNAL DIMENSIONAL DATA		
Length Overall (inches) Length Overall (mm)	36" 914	
Depth Overall (inches) - Less handle Depth Overall (mm) - Less handle	29 1/4" 743	
Height Overall— on 6" casters (inches) Height Overall—on 6" casters (mm)	34 5/8" 880	
Top Drawer Extension (when opened)	17 3/4"	
Bottom Drawer Extension (when opened)	15 3/4"	
Number of Drawers	2	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.) NET Capacity (Liters)	8.5 241	
Internal Length Overall (inches) Internal Length Overall (mm)	32" 813	
Internal Depth Overall (inches) Internal Depth Overall (mm)	20" 508	
Internal Height Overall (inches) Internal Height Overall (mm)	23" 584	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	7.0	
ENERGY CONSUMPTION (KWH)	N/A*	
REFRIGERATION DATA		
Horsepower	1/5	
WEIGHT DATA		
Gross Weight (Crated lbs)	210	
Gross Weight (Crated kg)	95	











*Not available at time of printing

DRAWER SUPPORT CAPACITY

MODEL	# OF PAN SUPPORTS (SUPPLIED)	POSSIBLE PAN COMBINATION
UCFD36A	1 WIDE	(4) 1/3 SIZE PANS OR
	and	(1) FULL SIZE PAN + (1) 1/3 SIZE PAN OR
	2 NARROW	(8) 1/6 SIZE PANS

PLAN VIEWS

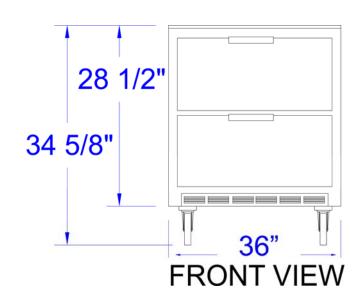

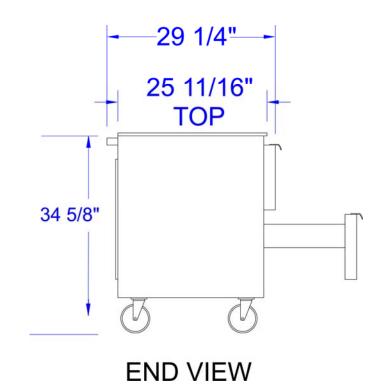

BEVERAGE-AIR® CORPORATION