



RANGES

Features

- The Kona Gas Ranges are available in six models, individual standing pilot, w/ static oven(s)
- 24" 4-burner, 1 static oven
- 36" 6-burner, 1 static oven
- 60", 10-burner, 2 static ovens
- 60", 6-burner w/ 24"- ¾" griddle plate, 2 static ovens
- 60", 6-burner w/ 24"- 1" griddle plate, 2 static ovens
- 60", 6-burner w/ 24" radiant charbroiler, 2 static ovens
- Simple manual thermostat controls (except model NJR-6B-24TG-60)
- Stainless steel front, back riser, & lift off shelf
- 30,000 BTU top burner (each), 30,000 BTU Oven
- Riser with removable shelf(s)
- 12" x 12" Cast iron grates
- Six 6" casters standard, Stainless Steel legs optional
- 3 position oven rack; 2 racks per oven
- Full pull-out crumb tray
- Oven interior door, sides, hearth are porcelain coated
- **Available in Natural gas(NG) or Liquid propane(LP).**
- **A conversion kit is supplied with each unit**

GAS REQUIREMENTS

- Natural Gas or Liquid Propane (LP) Gas main supply required
- A conversion kit is supplied with each unit. In order to avoid any warranty issues, conversion of your unit must be completed by an authorized Ikon service agent
- 3/4" NPT gas connection
- 30,000 BTU's per burner
- One pilot light per burner
- Natural gas 4" W.C., LP gas 10" W.C.



NJR-4-24



NJR-6-36



NJR-10-60



NJR-6B-24MG-60
NJR-6B-24TG-60



NJR-6B-24RB-60




NJR-6B-24RG-60



RANGES

Dimensions in inches

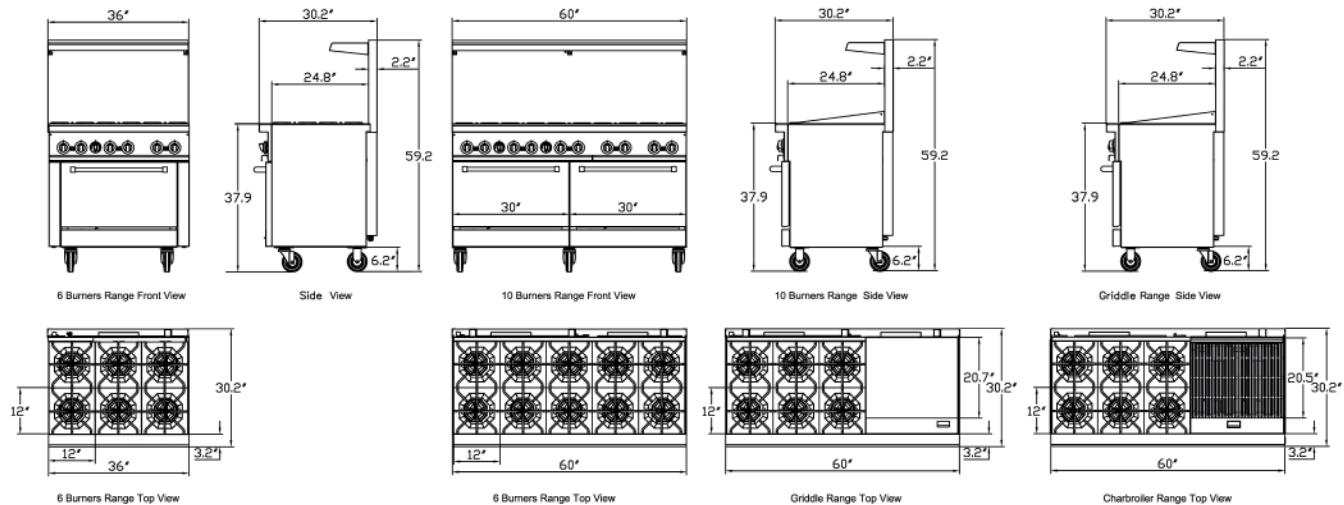

Specifications

Oven inside dimensions
NJR-4-24 19-3/4"W x 22-1/2"D x 18"H \ NJR-6-36 26-1/2"W x 22-1/2"D x 18"H \ NJR-10-60 26-1/2"W x 22-1/2"D x 18"H

Please Note: These items are shipped on a pallet and are crated for protection during LTL shipment.

Model	Description	Total BTU	KW	Overall Dimensions	Weight	Shipping Dimensions	Shipping Weight
NJR-4-24	(4) Burners	153,000 NG	45	23.9"W x 31.4"D x 60.2"H (61cm x 79.8cm x 153.0cm)	277 lbs (126 kg)	28.0"W x 37.0"D x 45"H (71cm x 94cm x 114cm)	366 lbs (166kg)
		136,000 LP	40				
NJR-6-36	(6) Burners	213,000 NG	63	35.9"W x 31.4"D x 60.2"H (91.2cm x 79.8cm x 153.0cm)	361 lbs (164.0kg)	39.8"W x 37.0"D x 45"H (101cm x 94cm x 114cm)	471 lbs (214kg)
		190,000 LP	56				
NJR-10-60	(10) Burners	366,000 NG	107	59.9"W x 31.4"D x 60.2"H (152.3cm x 79.8cm x 153.0cm)	621 lbs (282kg)	65.0"W x 37.0"D x 45"H (165cm x 94cm x 114cm)	764 lbs (347kg)
		326,000 LP	96				
NJR-6B-24MG-60	24"Griddle& (6)Burners (Manual Control)	306,000 NG	90	59.9"W x 31.4"D x 60.2"H (152.3cm x 79.8cm x 153.0cm)	674 lbs (306kg)	65.0"W x 37.0"D x 49"H (165cm x 94cm x 125cm)	817 lbs (371kg)
		272,000 LP	80				
NJR-6B-24TG-60	24"Griddle& (6)Burners (Therm Control)	306,000 NG	90	59.9"W x 31.4"D x 60.2"H (152.3cm x 79.8cm x 153.0cm)	708 lbs (322kg)	65.0"W x 37.0"D x 49"H (165cm x 94cm x 125cm)	864 lbs (392kg)
		272,000 LP	80				
NJR-6B-24RB-60	24" Radiant Broiler & (6)Burners	316,000 NG	93	59.9"W x 31.4"D x 60.2"H (152.3cm x 79.8cm x 153.0cm)	631 lbs (287kg)	65.0"W x 37.0"D x 49"H (165cm x 94cm x 125cm)	787 lbs (357kg)
		288,000 LP	85				
NJR-6B-24RG-60	24" Radiant Broiler & (6)Burners	306,000 NG	90	59.9"W x 31.4"D x 60.2"H (152.3cm x 79.8cm x 153.0cm)	704 lbs (320kg)	65.0"W x 37.0"D x 52.4"H (165cm x 94cm x 133cm)	860 lbs (390kg)
		272,000 LP	80				