


PROJECT	
ITEM NO:	
OHANTTTV	

## **Undercounter Dish Tables**

Straight Design

### **FEATURES & CONSTRUCTION:**

- Top is fabricated with 1-1/2" rounded edge on working sides and 10-1/2" high backsplash
- Table front and side edges formed with hemmed edges to provide extra rigidity and safe to touched finished.
- Sink bowl to have coved corner with 3/4" radius.
- All exposed welded areas smooth polished to brush finish sanitary #4.
- Welded cross brass.
- Welded stainless steel leg socket for removable table legs.
- 20"x20"x4" deep pre-rinse basket included.
- All units shipped K.D. and easily assembled.

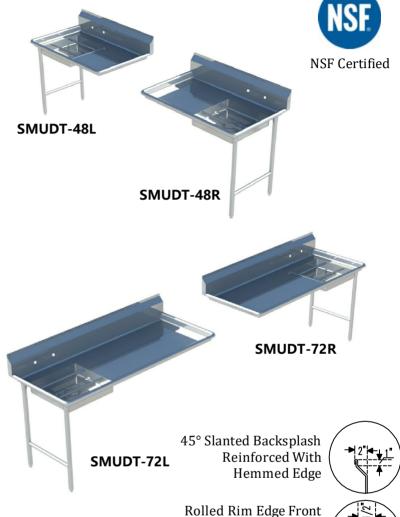

### **MATERIAL:**

Top: 16 Ga. Stainless Steel - 304 Sink Bowl: 16 Ga. Stainless Steel - 304

Leg: 16 Ga. Stainless Steel


(15/8" Tubing)

Leg Bracing: 20 Ga. Stainless Steel -201

(11/4" Tubing)

Bullet Feet: Stainless Steel (1" Adjustable ) Pre-Rinse Basket: 18 Ga. Stainless Steel - 304

Undercounter Dishtables			
L	Left Side Sink	Right Side Sink	
	MODEL NO.		
48"	SMUDT-48L	SMUDT-48R	
72"	SMUDT-72L	SMUDT-72R	



Stainless Steel **Bullet Feet** 1" Adjustable

And Sides Reinforced with



3 1/2" Drain Basket Included



Rev. 11/16



SAPPHIRE MANUFACTURING

Tel:718-543-2111 Fax: 718-543-2121

info@sapphiremanufacturing.com WWW.SAPPHIREMANUFACTURING.COM




ITEM NO: \_\_\_\_\_

QUANTITY:


# **Undercounter Dish Tables**

# Straight Design

### SMUDT-48L




### SMUDT-48R




# NSF Certified


### SMUDT-72L



## SMUDT-72R



Common End View



Mounting Bracket Side View



# **Pre Rinse Basket**


## FEATURES & CONSTRUCTION:


- Perforated Stainless Steel
- Fabricated with 3/4" radius coved corners
- All exposed welded areas smooth polished to brush finish sanitary #4.

### MATERIAL:

Bowl: 16 Ga. Stainless Steel - 304 Cross Rail: 1" Stainless Steel Tubing

Pre Rinse Basket		
Model	PRB-2020	





Specifications subject to change without notice. All

All dimensions are typical (Tolerance 1/2").



SAPPHIRE MANUFACTURING

Tel:718-543-2111 Fax:718-543-2121

info@sapphiremanufacturing.com
WWW.SAPPHIREMANUFACTURING.COM

Rev. 11/16